


22539

HIGH FIDELITY OUTPUT TRANSFORMER

WITH ULTRA-LINEAR SCREEN TAPS

20 WATTS

FREQUENCY RESPONSE 0 DB FROM 20 to 20,000 CYCLES

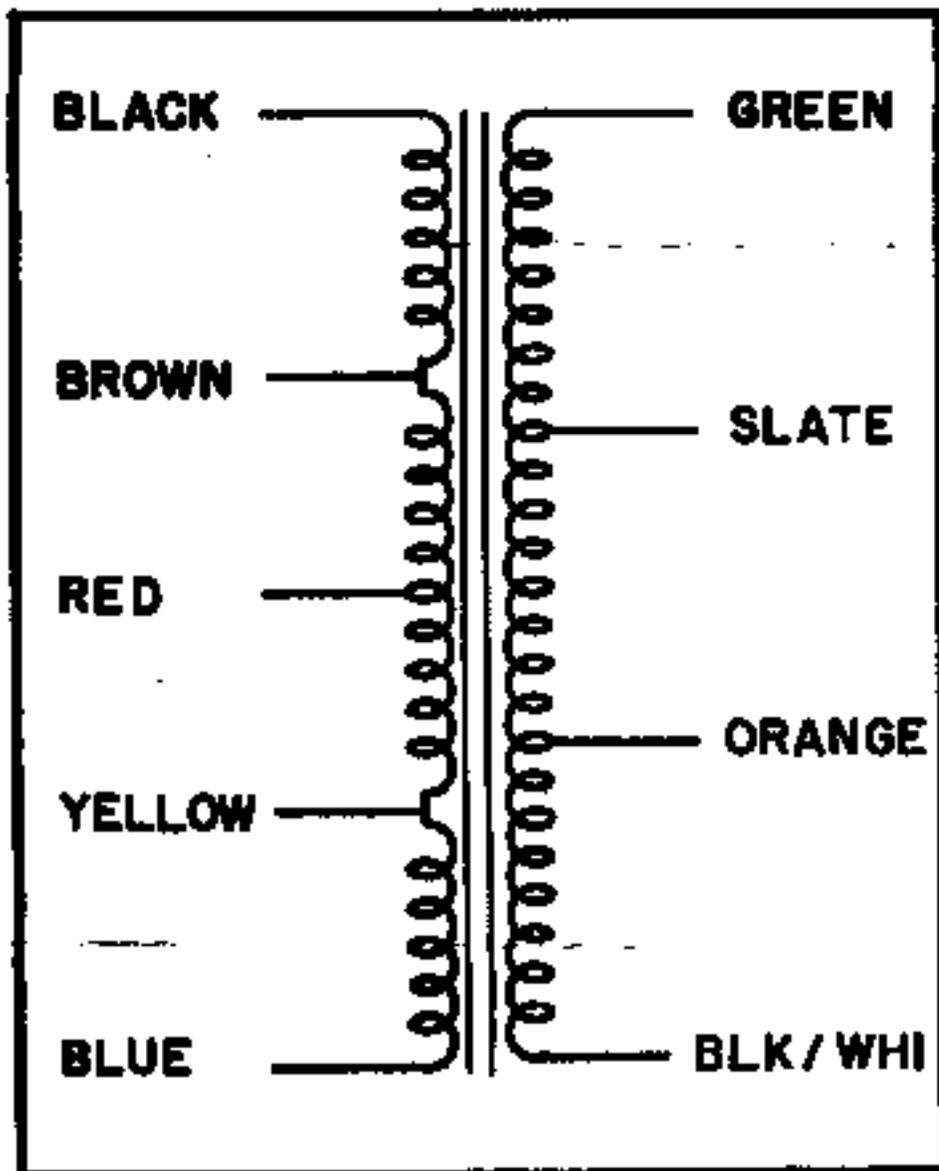

Primary 8,800 Ohms CT at 100 MADC each side of CT. Provided with screen taps for Ultra-Linear operation. Connect Black to the Plate and Brown to the screen of one of the Push-Pull output tubes. Connect Blue to the Plate and Yellow to the screen of the other Push-Pull tube. Red connects to B(Plus).

Secondary - 4/8/16 Ohms

Common.....	BLACK/WHITE
4 Ohms.....	ORANGE
8 Ohms.....	SLATE
16 Ohms.....	GREEN

Continued on Reverse Side

